

## DeoxIT® Fader F5 Spray, F-Series

### Moving Contact Lubricant for Conductive Plastic Faders & Controls

**1. Part No.:**

F5S-H6

**2. Container Size:**

142 g (5.0 oz.)

**3. Product Description:**

Precision lubricant for conductive plastics and carbon-based controls (faders, slide potentiometers, conductive membranes - mouse pads and other mechanisms with sliding surfaces). It replenishes lubrication lost on surfaces that have been cleaned with solvents or other cleaning solutions. Use on conductive plastics and other sliding metal-plastic surfaces. Temperature range: -26°C to +150°C.

**4. Features/Benefits:**

*Spray, Perfect-Straw™ valve - Flushing action, Safe on plastics.*

DeoxIT® Fader F100L concentrate has approximately 0.0% chemical cleaning action.

DeoxIT® Fader is not for metal contacts/connectors, use DeoxIT®, DeoxIT® Gold and DeoxIT® Shield for those surfaces.

Replaces lubrication lost that have been cleaned with solvents or other cleaning solutions.

Perfect for OEM's

Excellent enhancing, excellent protection, No ozone depletion.

Reduces intermittent connections, arcing, RFI, wear and abrasion.

**Cleaner Audio - Clearer Video - Reliable Data.**

**5. Formulation:**

- 5% DeoxIT® Fader F100L, F-Series
- 75% Odorless mineral spirits (CAS 64742-88-7)
- 20% DIFLUOROETHANE (CAS 75-37-6)



**6. Which DeoxIT® product do I Use:**

- ▶ Use **DeoxIT® Fader F-Series** to lubricate and protect conductive plastic and carbon-based controls.
- ▶ Use **DeoxIT® D-Series** contact cleaner on surfaces that have been in service or have visual signs of oxidation. Contains 20% active cleaner.
- ▶ Use **DeoxIT® Gold G-Series** conditioner on new surfaces, and gold plated surfaces. Ideal for preventing dendrite/fretting corrosion. Protects both surface and base metals. Ideal for critical applications. Contains >1% active cleaner.
- ▶ Use **DeoxIT® Shield S-Series** to protect surfaces from severe environments (humidity, salts, pollutants, sulfur, etc.). Use on clean surface. Contains 0% active cleaner.



Audio/Video



Computers



Automotive



Communications



Marine



Electrical



Energy



Photography



Security



Medical



Avionics

### 7. Directions for Use:

1. Turn off, unplug the device.
2. DeoxIT® Fader F-Series is for conductive plastic materials; however, there may be metal materials involved with the contact or control. On these metal surfaces that have been in service or have visual signs of oxidation or corrosion pre-treat with DeoxIT® D-Series (D5S-6) contact cleaner. See Data Sheet DS-D5S-6 and Audio/Video 9-1-1 Information Sheet (<http://store.caig.com/s.nl/it.l/id.52/f>).
3. Next, adjust valve (L-M-H) on the DeoxIT7 Fader F5S-H6 and utilizing the extension straw, apply one short burst of DeoxIT® Fader onto the plastic surface.
4. Operate the part/device to help distribute the DeoxIT® in the control or contact area. Wait a few seconds, reapply one short burst. **Test for compatibility before use.**
5. Wait two minutes before turning on equipment.
6. **For extended protection:** For additional lubrication and/or more tactile feel, apply DeoxIT® FaderGrease onto plastic surfaces; <http://store.caig.com/s.nl/sc.2/category.305/f>
7. **NOTE:** To prevent overspray or spraying in unwanted areas, you can always spray onto a lint-free swab or cloth first and then using the swab/cloth apply the DeoxIT® to the control/connector/contact surface(s).

### 8. Other Applicators:

Part No.	% DeoxIT®	VOC (%)	Applicator	Size	Flammable/Nonflammable
F5S-H6	5%	75%	spray	163 g	flammable
FN5S-2N	5%	0%	mini-spray	40 g	nonflammable
F100S-2	100%	0%	spray	57g	nonflammable
F100L-2C	100%	0%	tube	2 mL	nonflammable
F100L-25C	100%	0%	needle dispenser	25 mL	nonflammable
F5L-A (bulk, many sizes)	5%	75%	bottle/drum	assort.	flammable

### 9. Product Selection Guides:

#### DeoxIT® - Product Selection Guide

	DeoxIT®	DeoxIT® GOLD	DeoxIT® GOLD GxL	DeoxIT® GOLD Gx2	DeoxIT® SHIELD	DeoxIT® FaderLube
New Surfaces		✓	✓	✓	✓	✓
* In Service / Used	✓					✓
Gold surfaces		✓	✓	✓		
Oxidation / corrosion visible	✓					
Conductive plastics						✓
** Outdoor / Severe environments	✓					✓
Deoxidizing / cleaning properties	20%	0.1%	0.1%	0.0%	0.0%	0.0%
Metal / Plastic surfaces	Yes	Yes	Yes	Yes	Yes	
Plastics compatibility	Excellent	Excellent	Excellent	Excellent	Excellent	Excellent
Temperature range (°C)	-34/200	-45/240	-45/310	-45/500	-34/210	-26/150
Stationary & moving surfaces	Yes	Yes	Yes	Yes	Yes	Yes
Seals & protects base metals	Good	Excellent	Excellent	Excellent	Good	No

✓ All products are Nonflammable and RoHS Compliant

\* In Service: Clean with DeoxIT®. For added protection, follow with DeoxIT® GOLD (indoors), DeoxIT® SHIELD (outdoors) or DeoxIT® Grease (additional barrier).

\*\* Severe environments: Pre-clean with DeoxIT®. Follow with DeoxIT® SHIELD or DeoxIT® Grease.

#### DeoxIT® - Spray Selection Guide

Product Series	FP	QD	NF	PC	VOC
Standard - 5% solution	✓			✓	75% (588g/L)
D5S-6, D5MS-15, G5S-6, G5MS-15, S5S-6, S5MS-15, F5S-6, F5MS-15					
N Series - 5% solution		✓	✓	✓	0.0%
DN5S-6N, DN5S-2N, GN5S-6N, GN5S-2N, SN5S-6N, SN5S-2N					
X Series - 5% solution	✓		✓	✓	0.0%
GX5S-6N					
100% Spray solution			✓	✓	0.0%
D100S-2, G100S-2, F100S-L2					

FP = Flushing properties QD = Quick dry / non drip

NF = Nonflammable PC = Plastics compatibility VOC = VOC (%)



Audio/Video



Computers



Automotive



Communications



Marine



Electrical



Energy



Photography



Security



Medical



Avionics

### 10. Materials Compatibility (Plastics, Rubber, Elastomeric and Metals):

(Rating: Not compatible, Poor, Fair, Good, Excellent), (N/A = Not applicable (no solvents and propellants))

(\* If the product is not 100% DeoxIT® then the package is rated before and after the solvents/propellants are applied to materials. Compatibility testing is always recommended)

Material Name	Rating (*100% DeoxIT®)	Rating (*with solvents)
ABS	Excellent	Fair-Good
Nylon	Excellent	Excellent
Lexan	Excellent	Excellent
HDPE	Excellent	Good
LDPE	Good	Good
C.E.Phenolic	Excellent	Good
Epoxy	Excellent	Excellent
Polycarbonate	Excellent	Fair-Good
PMMA	Good	Fair
POM	Excellent	Excellent
PP	Excellent	Good
PS	Good	Fair
PTFE	Excellent	Excellent
PVC	Excellent	Excellent
TPE/Rubber/Varnish	Fair	Poor

#### IMPORTANT:

**Rating, 100% DeoxIT®:** Any of the above that fall into the "Fair" and "Poor" categories should be thoroughly tested for compatibility. They may be compatible, however, it will depend on the manufacturing process of the materials. Acrylics, ABS, and polycarbonate, if under stress, may show slight cracking or crazing damage. Test for compatibility before use. On porous materials; i.e. wood, rubber, cloth, some phenolics, semi-cured materials, no liquid or solvents should be used. Occasionally, DeoxIT® will get onto unwanted surfaces, quickly wipe off surface and usually no damage will occur.

**Rating, with solvents:** Similar to rating above (100% DeoxIT®). However, any rating worse than the 100% DeoxIT® may require additional care. If DeoxIT is applied to unwanted areas or materials, wipe off surface quickly and usually no damage will occur. Alternatively, apply DeoxIT® onto a lint-free swab or cloth first and then wipe onto desired metal surface.

### 11. DeoxIT® Essential Reference:

**DeoxIT® D-Series** - Brings old systems back to life!


**DeoxIT® Gold G-Series** - Maintains new system performance!

**DeoxIT® Shield S-Series** - Maintains new system performance for severe environments!

**DeoxIT® Fader F-Series** - Clean, lubricate & protect conductive plastic and carbon compound faders!

### 12. Shipping and Additional Information:

Hazardous: ORMD  
VOC (%): Part No. F5S-H6, 75% (588 g/L)

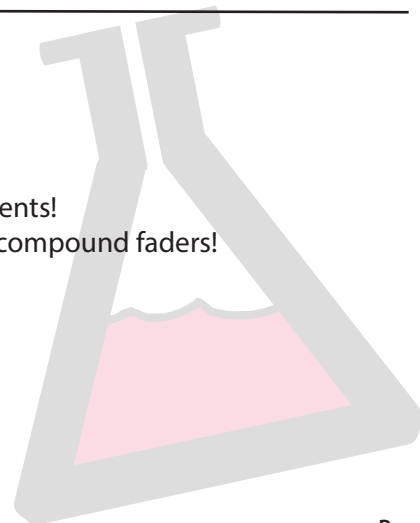



Audio/Video



Computers



Automotive



Communications



Marine



Electrical



Energy



Photography



Security



Medical



Avionics

### 13. Other Information:

RoHS Compliant:

YES

VOC Compliant:

YES

**MSDS Link, F5S-H6**

<http://caig.com/material-safety-data-sheets/>

DeoxIT® Product Sheet:

<http://caig.com/technical-data/>

CAIG Essential Guide:

<http://caig.com/product-literature/#toggle-id-1>

WHY DeoxIT® is Different:

<http://caig.com/product-literature/#toggle-id-9>

### 14. MANUFACTURER DISCLAIMER:

To the best of our knowledge, the information contained herein is accurate. However, neither CAIG Laboratories, Inc., or any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. All materials may present unknown hazards and should be used with caution. In particular, improper use of our products and their inappropriate combination with other products and substances may produce harmful results which cannot be anticipated. Final determination of the suitability of any material is the sole responsibility of the user. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that may exist. All service performed on internal parts and equipment should be provided by qualified technicians.

### 15. Contact Information:



**Website:** [www.caig.com](http://www.caig.com)  
[www.deoxit.com](http://www.deoxit.com)

**General email:** [info@caig.com](mailto:info@caig.com)

**Technical email:** [tech@caig.com](mailto:tech@caig.com)

#### North America (Headquarters):

CAIG Laboratories, Inc.  
12200 Thatcher Court  
Poway, CA 92064-6876 USA  
Tel: (858) 486-8388  
Fax: (858) 486-8398

#### Distributors (Domestic & International):

<http://caig.com/distributors/>



#### CAIG Laboratories, Inc.

12200 Thatcher Court, Poway, CA 92064 U.S.A.

**P:** 858/486-8388 | **E:** [info@caig.com](mailto:info@caig.com)

**WEB:** [www.caig.com](http://www.caig.com) | [www.deoxit.com](http://www.deoxit.com)

